

GHEGIGRIG.COM



HUMDINGER MANUAL

CONTENTS

1. Introduction
2. Operation
3. Set Up Examples;
 - 3.1. End Of Chain Splitting
 - 3.2. TPS Wet/ Dry
4. Technical Specification
5. Warranty

1. Introduction

TheGigRig HUMDINGER is an active splitter with a buffered output (Out 1), and a buffered, isolated, phase reversible output (Out 2).

HUMDINGER INPUT: Plug in here

POWER: Uses a standard 9V DC 2.1mm centre negative power supply @100mA

OUT 1: This is the normal buffered output and includes the ground/earth

OUT 2 ISOLATED: This is the output that gives the option of isolation and reversing the relative phase to output 1

OUT 2 PHASE: Flips the phase on output 2 EARTH LIFT: Enables you to lift the earth on output 2



2. Operation

Connect a standard 9v DC centre negative 2.1mm plug power supply that can deliver at least 150mA. Connect your guitar/bass signal to the INPUT. Connect outputs 1&2 to wherever you need them to go (see example diagrams).


PHASE: Out 2 features a phase switch. This will reverse the phase on Out 2 relative to the phase on Out 1. With both amps on, toggle the phase switch to see which position has more bottom end and volume. The position that has more bottom end will mean both amplifiers are in phase.

EARTH LIFT: Out 2 features an earth lift switch. With this button pushed in, your signal earth is connected through Out 2. With this button disengaged (button out), your earth/ground is lifted. This results in isolation between Out 1 and Out 2 and will remove any earth loop noise you get from connecting two amplifiers together.


PLEASE NOTE: Out 2 is an exact mirrored image of Out 1. The phase switch works regardless of the configuration of the earth lift button.

3. Set Up Examples

3.1 END OF CHAIN SPLITTING: The most common way to set up the HumDinger is to position it at the end of your signal chain, enabling your signal to split between 2 different amps. You can also send your Out 1 to your amp and the isolated output to your DAW for re-amping later.

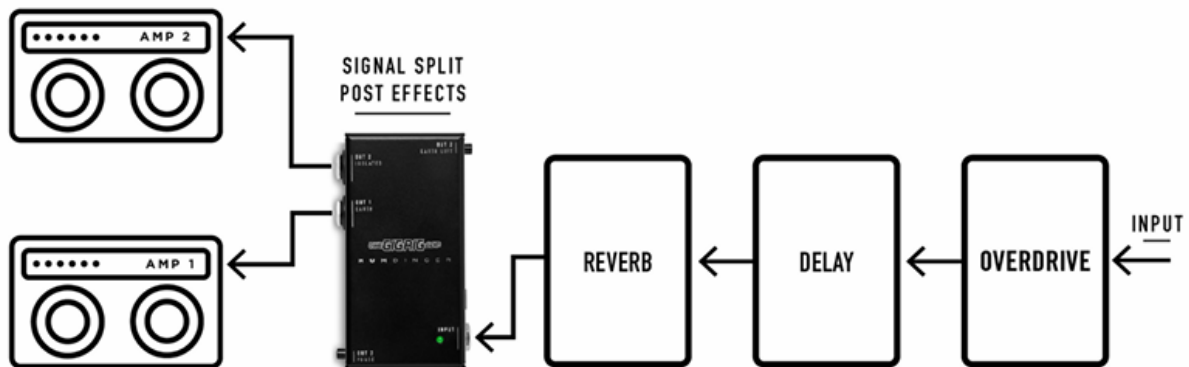

3.2 TPS WET/DRY: The Humdinger's separate outputs can be used to split the signal path. In the diagram below the signal is split after the gain stages; the Out 2 ISOLATED output is sent to your dry amp and the Out 1 BUFFERED output is sent to your wet effects (delay, reverb, etc.) then to your wet effects amp. It's a great way to get faux stereo sounds from lly a dual mono signal path. From here, a Wet/Dry/Wet set up is as easy as connecting the wet side in stereo and having the dry amp in the centre.

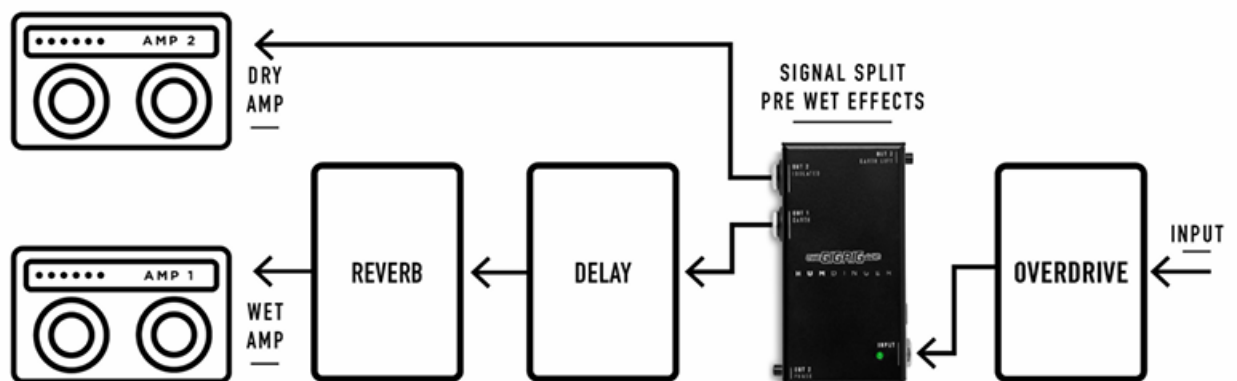

4. Technical Specification

Technical Specifications: Supply Voltage: 9V DC Supply Current: Max = 100mA at 9V Input Signal Levels: +/- 17V (34V headroom peak to peak) Input impedance 680K Ohm (DC Coupled) Output A Buffered: Low Noise: 3nV/ $\sqrt{\text{Hz}}$ Output impedance 100 Ohm Frequency response: 5Hz to 100Khz, into 1M Ohm Output B Isolated: Low Noise: 3nV/ $\sqrt{\text{Hz}}$ Output impedance 100 Ohm Frequency response at guitar levels 5Hz to 100KHz

5. Warranty

The GigRig warrants the product to be free from defects in material and workmanship for a period of 2 years from the original date of purchase.

If the product fails within the warranty period, The GigRig will repair or, at our discretion, replace the product and cover the cost of return shipping to the original purchaser. This warranty covers defects in manufacturing discovered while using this product as recommended by The GigRig. This warranty does not cover loss or theft, nor does the coverage extend to damage caused by misuse, abuse, unauthorized modification, improper storage, lightning, or natural disasters.

Damage caused by any of the above circumstances may result in a non-warranty repair fee. Legal: In the case of malfunction, the purchaser's sole recourse shall be repair or replacement, as described in the preceding paragraphs. The GigRig will not be held liable to any party for damages that result from the failure of this product. Damages excluded include, but are not limited to, the following: lost profits, lost savings, damage to other equipment, and incidental or consequential damages arising from the use, or inability to use this product.

In no event will The GigRig be liable for more than the amount of the purchase price, not to exceed the current retail price of the product. The GigRig disclaims any other warranties, express or implied. By using the product, the user accepts all terms herein.

Disposal: TheGigRig contains no batteries or Lead. Return the unit to TheGigRig Ltd for disposal or use standard disposal for electrical equipment recommended in your country. Do not dispose of electrical equipment in household waste!

TheGigRig is protected by copyright, moral rights, patent and design registration.

'GigRig' is a stylized trademark. No 2343300

Any individual or company found copying the functionality, look or feel, circuits, circuit function or software functions for commercial gain will be liable for legal action. Licenses may be granted to non-competing companies.

The GigRig and its Power supply are RoHs compliant.

Tested and compliant to EN 60950 safety standard.

The power supply is approved to all USA and European

Regulations including UL. See separate instructions supplied with the power supply

Manufacturer: The GigRig Ltd, Unit 15 Whitehill Industrial Pk, Royal Wootton Bassett, SN4 7DB

Authorised Representative: EAS - Mustamäe tee 50, 10621 Tallinn, Estonia

Warning: For indoor use only. Keep away from water. Keep away from Children.

